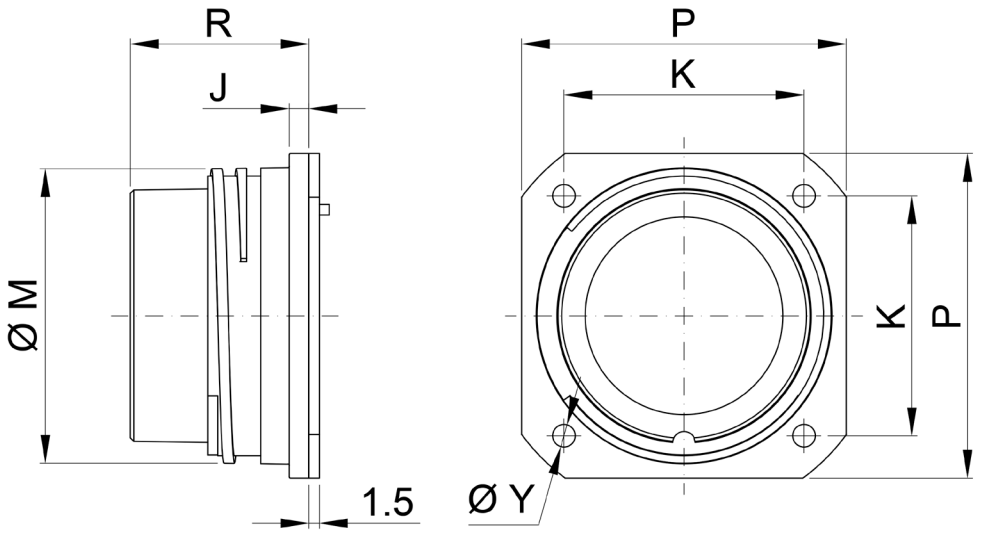

General dimensions	
K:	41mm
ØM:	52mm
P:	56mm
R:	25.3mm
ØY:	3.2mm
J:	2.8mm

Specifications:

Series:	92
Gender:	Socket/Female
Format:	Receptacle
Connector size:	T40
Number of contacts:	7
Shell:	Aluminium alloy
Connector plating:	Black (2)
Coupling	Screwlock
Insulator:	Thermo-hard
Mating cycles:	500+
Adjustable cable gland:	n/a
Ingress protection:	IP67 when mated

Resistant to saline atmosphere 600h ASTM B-117

Contacts:	Copper alloy
Contact plating:	Gold over nickel
Termination method:	Solder
Max wire section:	1 x 5.1mm² & 6 x 13mm²
Max contact resistance:	0.005Ω
Working voltage:	420V ac
Test voltage:	2.500V ac
Working current:	1 x 25A & 6 x 50A

Part Number: 92 02 47M00 0 S 0 2 0
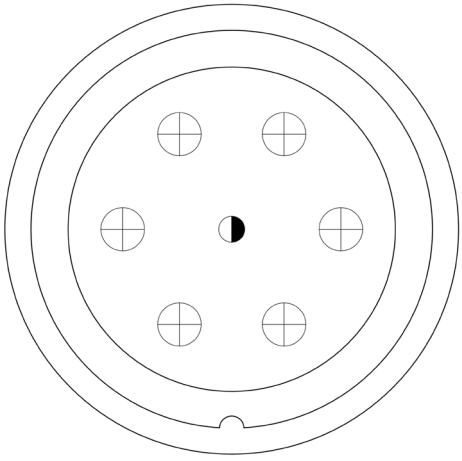
- Series: 92
- Type: Receptacle
- Insulator planform: 47M
- Polarisation: Standard
- Gender: Socket/Female
- Cable clamp: n/a
- Finish: Black (non-conductive)
- Seal protection: Standard