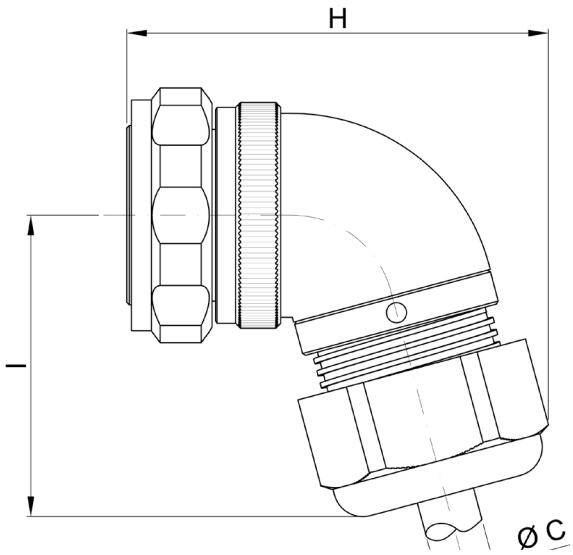

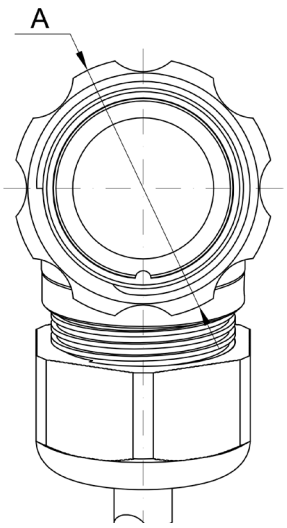

General dimensions	
I:	82mm
ØA:	64.5mm
H:	97mm
ØC:	22-32mm

Specifications:

Series:	92
Gender:	Plug/Female
Format:	Angled Plug
Connector size:	T40
Number of contacts:	24
Shell:	Aluminium alloy
Connector plating:	Black (2)
Coupling	Screwlock
Insulator:	Thermo-hard
Mating cycles:	500+
Adjustable cable gland:	D (22-32mm)
Ingress protection:	IP67 when mated

Resistant to saline atmosphere 600h ASTM B-117

Contacts:	Copper alloy
Contact plating:	Gold over nickel
Termination method:	Solder
Max wire section:	16 x 1.75mm² & 8 x 5.1mm²
Max contact resistance:	0.005Ω
Working voltage:	355V ac
Test voltage:	1.750V ac
Working current:	16 x 10A & 8 x 25A

Part Number: 92 08 424AA 0 S D 2 0
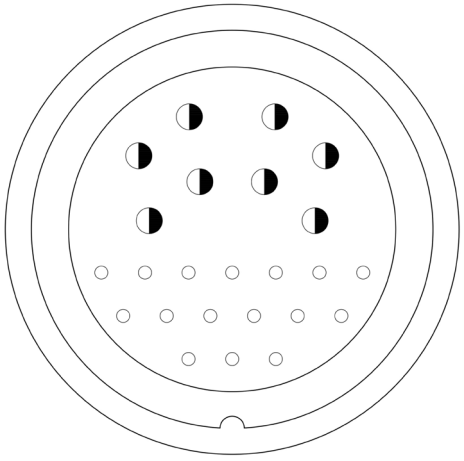
- Series: 92
- Type: Angled Plug
- Insulator planform: 424AA
- Polarisation: Standard
- Gender: Plug/Female
- Cable clamp: D (22-32mm)
- Finish: Black (non-conductive)
- Seal protection: Standard