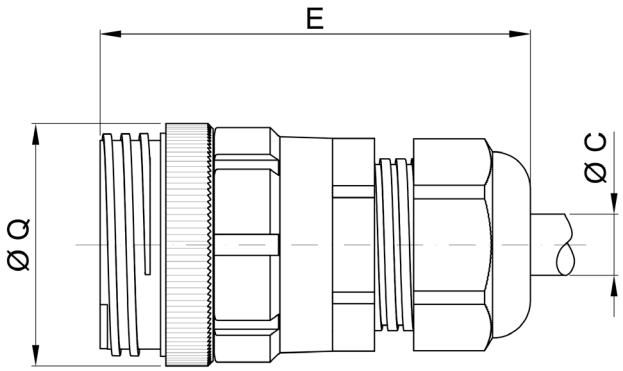



General dimensions	
E: (min)	59.5mm
E: (max)	65mm
ØQ:	24mm
ØC:	4.5-10mm

Specifications:

Series:	92
Gender:	Socket/Male
Format:	Extender
Connector size:	T10
Number of contacts:	9
Shell:	Aluminium alloy
Connector plating:	Black
Coupling	Screwlock
Insulator:	Thermoplastic
Mating cycles:	500+
Adjustable cable gland:	D (4.5-10mm)
Ingress protection:	IP67 when mated

Resistant to saline atmosphere 600h ASTM B-117

Contact part number:	PX (supplied separately)
Contacts:	Copper alloy
Contact plating:	Gold over nickel
Termination method:	Crimp
Max wire section:	0.75mm²
Max contact resistance:	0.005Ω
Working voltage:	150V ac
Test voltage:	1.050V ac
Working current:	9 x 7.5A

Part Number: 92 01 19CD0 0 P D 2 0
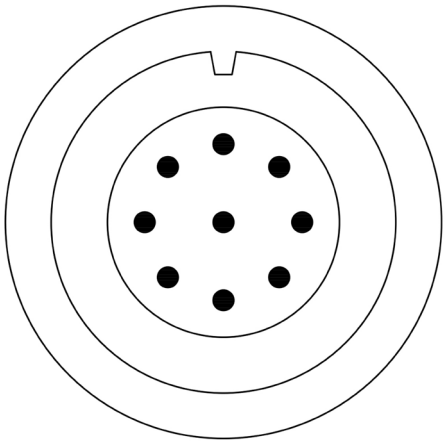
- Series: 92
- Type: Extender
- Insulator planform: 19CD
- Polarisation: Standard
- Gender: Socket/Male
- Cable clamp: D (4.5-10mm)
- Finish: Black (non-conductive)
- Seal protection: Standard